

Matplotlib

A python plotting suite

R. David

david@unistra.fr

Direction Informatique

28/09/2011


changes
espiritualidad
insertion
perspectives
mutualisation
reussite
ouverture
fondation
CHEMISTRY
spatiation
biology
 $E = mc^2$
RECHERCHE
SYNERGIES
COMPETENCES
pi
TECHNOLOGY
doctorat
cosmopolite
ENSEIGNEMENT SUPÉRIEUR
biotechnologies
axiome
mécanique
management
capitale
droit
excellence
savoirs
wissenschaft
bibliothèques
médecine
tesis
théologie
gravitation
idéaux
connaissances
musica
langage
INTERNATIONAL
solution
HEURISTIQUE
partenariats
HISTOIRE
physique
mécanique quantique
insertion
PLURIDISCIPLINARITÉ
sciences
gravitation
humain
molécule
ambition
quantique
MASTER
cultures
NETWORK

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion


- ▶ From <http://matplotlib.sourceforge.net/> : *matplotlib is a python 2D plotting library which produces publication quality figures in a variety of hardcopy formats and interactive environments across platforms*
- ▶ Not only :
 - for plotting : contains numerical functions mimicing matlab (useful in interactive environments)
 - can be used for animations
 - for 2D : has some *extensions* for 3D
 - a library : rather a suite. It has several interfaces

- ▶ As several python Numerics package, it relies on numpy
- ▶ Several others dependencies :
 - Output formats \Rightarrow *renderers* :
 - png library with high-quality anti-graining (Agg)
 - SVG
 - GDK (Gimp)
 - combined with Graphical user interfaces \Rightarrow *backends* :
 - QT, TK, GTK, macosX
- ▶ Several namespaces for the same functions


Examples (from the website)

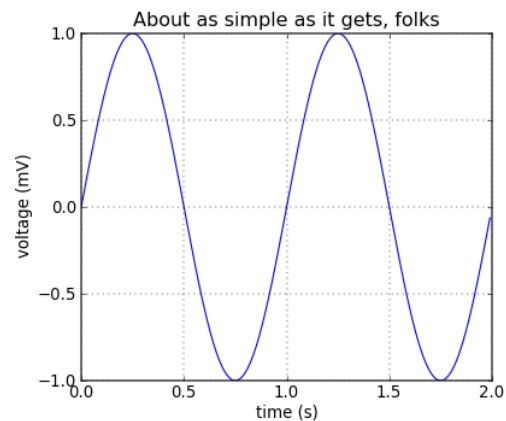


9 lines of code

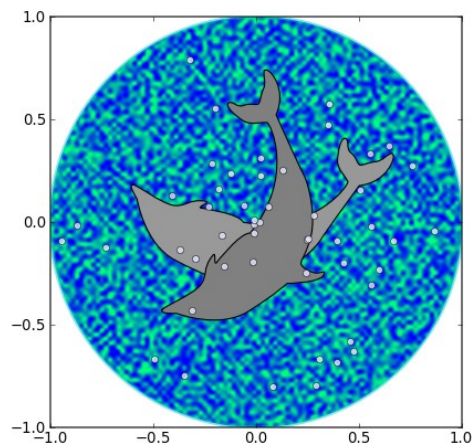

91 lines

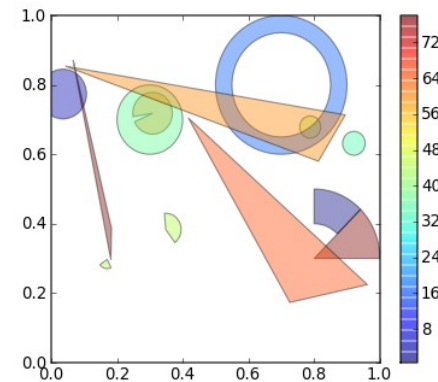

46 lines

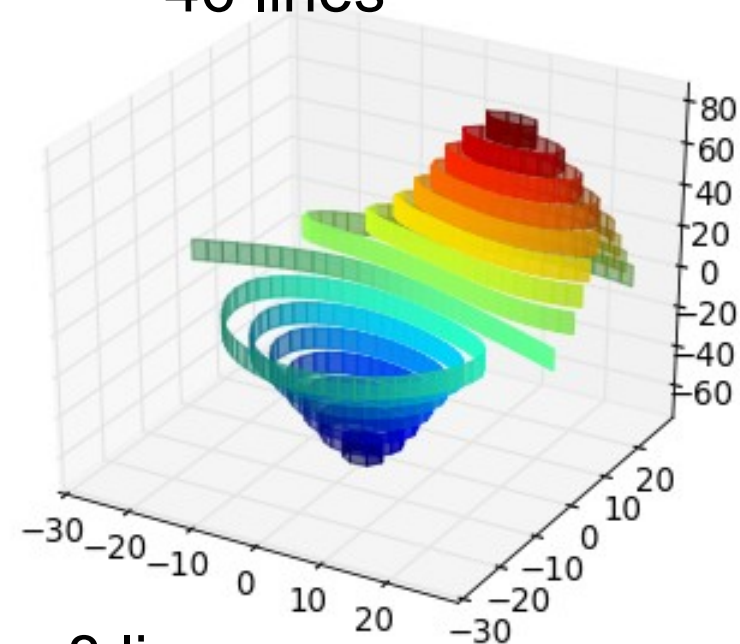

8 lines

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Matplotlib as an interactive tool
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion

- ▶ Matplotlib basics functions are included in the pyplot sub-package :

```
import matplotlib.pyplot as plt
```

- ▶ pyplot is designed to look like matlab
- ▶ basic command : `plot`
- ▶ plots lines with optionnaly markers
- ▶ markers and linestyle are documented using the `help (plt.plot)` statement
- ▶ The plot command applies to the last plot you modified (stateful)

▶ Plot example :


```
plt.plot([1,2,3,4])
```

▶ Defaults behaviour :

- Line style : blue, continuous
- X data : from 0,1,2,3, computed from the number of values to plot

▶ Without defaults

```
plt.plot([0,1,2,3],  
         [1,2,3,4], 'b-')
```

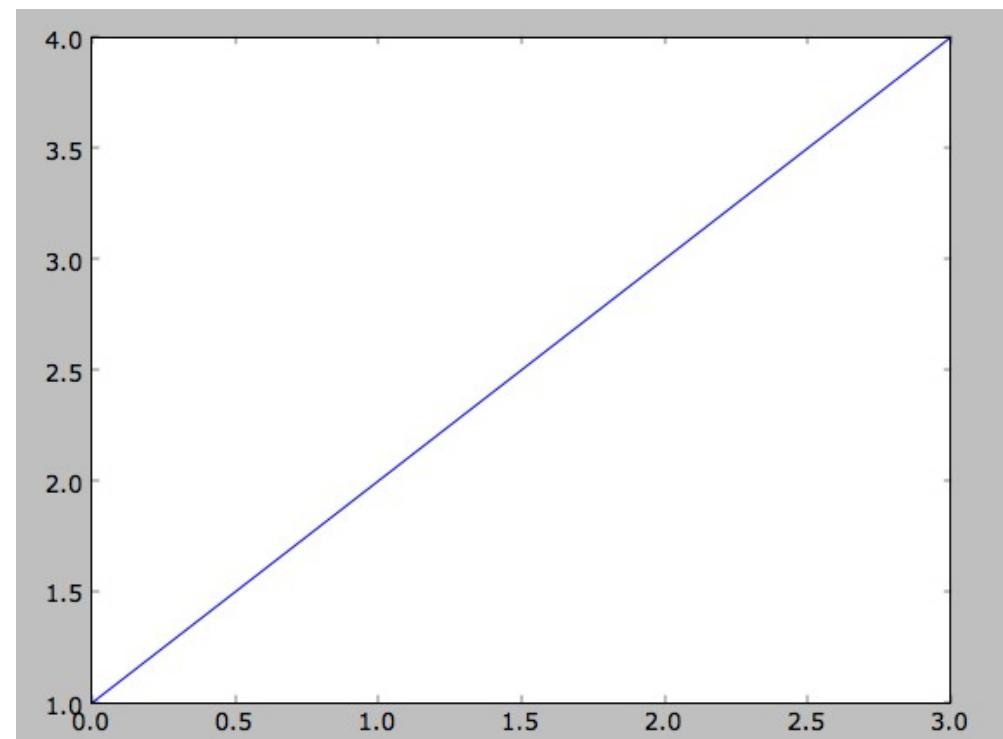

- ▶ The plot function returns an variable with type `Lines2D`, which can then be modified


```
l=plt.plot([1,2,3,4])
```

```
# Python style
```

```
plt.setp(line, color='r',  
         linewidth=2.0)
```

```
# Matlab style
```

```
plt.setp(line,  
         'color','r',  
         'linewidth',2.0)
```

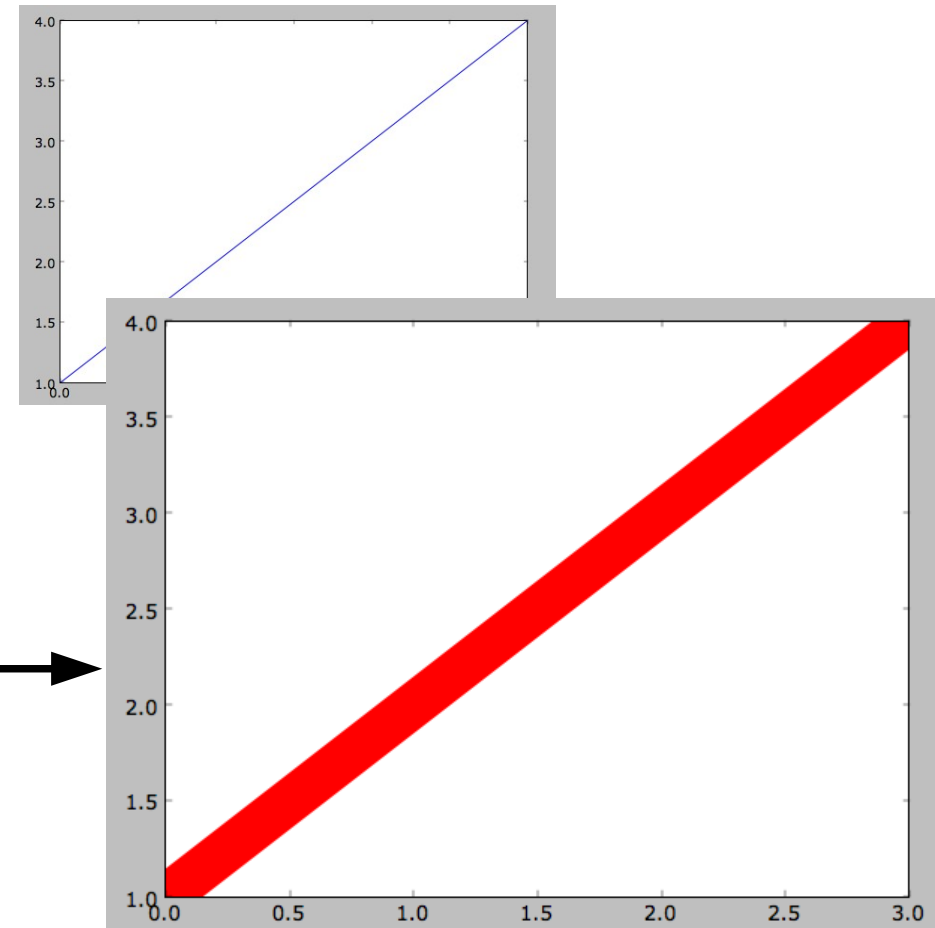

Same function, different argument style

- ▶ There are several other functions available in the `plt` namespace

List available using `help(plt.plotting)`:

- autocorrelation,
 - contour
 - histograms
 - pie charts
 - plotfile
- ▶ Some of the functions make useful computations on data
 - ▶ **Matplotlib uses numpy arrays**

- ▶ Up to now, the basic workflow was as follows :

```
import matplotlib.pyplot as plt
plt.plot(something)
```

- ▶ In order to use this in a (text) program, you have to :

- use a backend without a gui
- add a savefig command

- ▶ The program rewrites into :

```
import matplotlib as mp
mp.use('agg') # mp.use() : matplotlib configuration
import matplotlib.pyplot as plt
plt.plot(something)
plt.savefig('something.png')
```

- ▶ Onclick (zoom)
- ▶ Default GUI
- ▶ ipython
 - autocorrelation,
 - barbs
 - contour
 - histograms
 - pie charts
 - plotfile
- ▶ Some of the functions make useful computations on data

- ▶ Up to now, the basic workflow was as follows :

```
import matplotlib.pyplot as plt
plt.plot(something)
```


- ▶ In order to use this in a (text) program, you have to :

- use a backend without a gui
- add a savefig command

- ▶ The program rewrites into :

```
import matplotlib as mp
mp.use('agg') # mp.use() : matplotlib configuration
import matplotlib.pyplot as plt
plt.plot(something)
plt.savefig('something.png')
```

- ▶ In interactive mode, plot commands spawn a window :

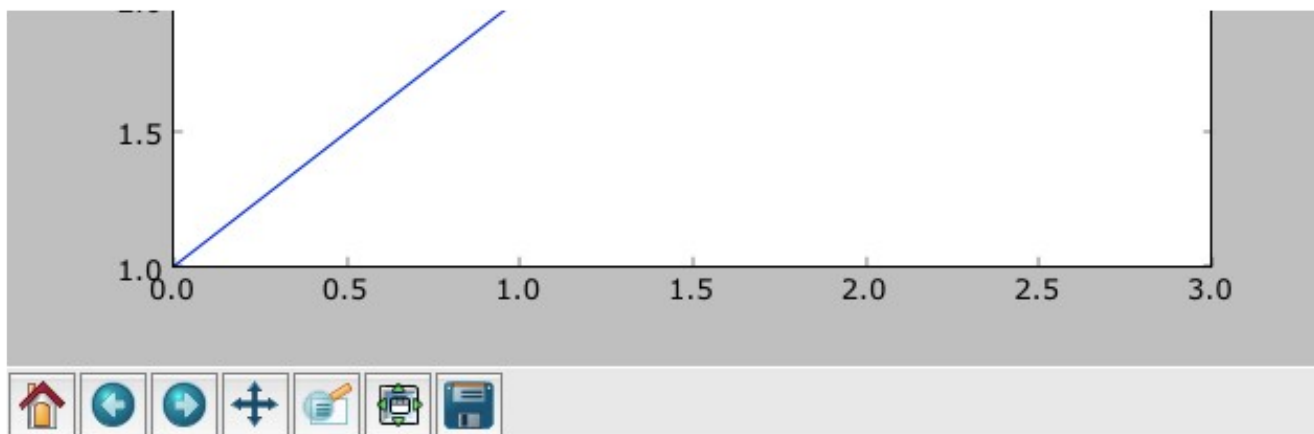

- ▶ In interactive mode, it is common to import a pylab module.
- ▶ `Pylab = matplotlib.pyplot + matplotlib.mlab numpy`
- ▶ `from matplotlib.pylab import *` brings everything in the same namespace

- ▶ Matplotlib is integrated in several python scientific environments providing editing and interactive features :
 - Interactive python *ipython*, <http://ipython.org/>
 - spyder, an IDE with matlab-like features, <http://packages.python.org/spyder/>
- ▶ The `-pylab` flag of ipython imports * from matplotlib.pylab at interpreter startup, thus bringing a lot of useful functions in the `__main__` namespace
- ▶ `ipython -pylab` is the recommended way of using ipython for exploration
- ▶ pydev dans Eclipse

- ▶ The **matplotlib.mlab** module provide 10 functions with matlab names, implemented on top of numpy, with matlab names
- ▶ It provides other helper functions to deal with text-files containing numerical values or some math functions needed by the authors of Matplotlib
- ▶ **mlab** is included when using pylab
- ▶ The module can be used with **`mpl_toolkits.exceltools`** : record arrays can be written out to Excel files with the `rec2excel` method

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion

- ▶ As working on images is a common task, there are helpers in matplotlib
- ▶ These helpers rely on the Python Imaging Library (PIL), <http://www.pythonware.com/products/pil/>
- ▶ The functions are contained in the matplotlib.pyplot module
 - work on images as 3D (R,G,B) arrays of real numbers in $[0:1[$
 - images are stored as numpy arrays

- ▶ Displaying an image

```
import matplotlib.pyplot as plt  
plt.imshow(plt.imread("ifremer.jpg"))
```

- ▶ Surprising, isn't it (not a bug in the slide) ?



- ▶ More functions :
 - changing the colormap
 - roating, resizing image
 - interpolating on pixels
- ▶ Note that the imaging facilities are a subpart of the pyplot package, tightly coupled with PIL for dealing with formats other than PNG

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion

- ▶ Similar to matlab mapping toolbox
- ▶ Transforms coordinate of map projections into data than can be plotted by matplotlib (pre-processing)
- ▶ Contains political boundaries, rivers, shorelines, taken from the GMT suite
- ▶ Connected to standard formats :
 - OpenDAP for data exchange
 - NetCDF (via pure python library)
 - Shapefiles
- ▶ Written by Jeffrey Whitaker
(<http://www.esrl.noaa.gov/psd/people/jeffrey.s.whitaker/>)

▶ Create a projection (29 available) :

```
from mpl_toolkits.basemap import Basemap
# setup lambert azimuthal equal area
  basemap.
# lat_ts is latitude of true scale.
# lon_0, lat_0 is central point.
m = Basemap(width=12000000,height=8000000,
            resolution='l',projection='laea',\
              lat_ts=50,lat_0=50,lon_0=-107.)
```

▶ Plot data (with coordinates) on the projection

- ▶ 29 Available projections can be listed accessing online help (65 in Matlab)

```
import mpl_toolkits.basemap
```

```
print basemap.supported_projections
```

- ▶ Azimuthal, Polyconic, Gnomonic, Mollweide, Transverse, North-Polar Lambert, Gall, Miller, Mercator, Stereographic, North-Polar Stereographic, Geostationary

Near-Sided, van der Grinten, Lambert Azimuthal Equal Area ,

McBryde-Thomas, Sinusoidal, South-Polar, Lambert, North-Polar Azimuthal Equidistant, Equidistant, Cylindrical, Oblique

Albers, South-Polar, Orthographic, Cassini-Soldner, South-Polar, Robinson

- ▶ The Basemap object instances contains several functions, including :
 - (filled) contour drawing
 - geographic drawings : coastlines, boundaries great circles, rivers, parallels, meridians...
 - `is_land(x, y)` : x, y are in projection coordinates, returns True/False
 - reading and plotting shapefiles
 - computing earth areas in the shadow at a given time
 - making nice plots : adding images as map background



- ▶ Using Nasa Blue Marble as a background :

```
import mpl_toolkits.basemap  
b=mpl_toolkits.basemap.Basemap()  
b.bluemarble()
```



▶ Adding political boundaries

```
b.drawcountries()
```




- ▶ The shapefile interface is :

```
b.readshapefile("landeareas", "lands",  
                drawbounds=True, zorder=None, linewidth=0.5,  
                color='k', antialiased=1, ax=None)
```

- ▶ `shapefile` : basename of the 3 components of the file

- ▶ `name` : (string) name of the attribute that will be added to the Basemap. This attribute holds the data of the shapefile

Land boundaries on the Antarctic

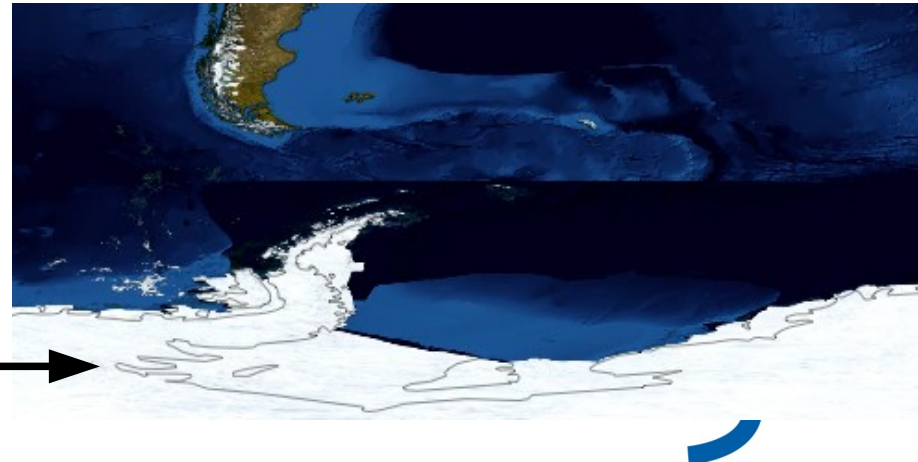

- ▶ The data hold by the "lands" attribute of the Basemap instance is made of a list of vertices

```
print b.lands
[(-96.36414655167492, 68.47130097246468),
 (-96.70338706497459, 68.48849366276391),
 (-97.14621337170688, 68.57308500473383), ...
```

- ▶ a list of attributes of the shapes

```
print b.lands_info
{'RINGNUM': 1, 'Name': 'Greenland', 'SHAPENUM': 4}
{'RINGNUM': 1, 'Name': 'Australia', 'SHAPENUM': 5}
```

- ▶ and a list of (low-level) geoslib polygons

- ▶ The data hold by the "lands" attribute of the Basemap instance is made of a list of vertices

```
print b.lands
[(-96.36414655167492, 68.47130097246468),
 (-96.70338706497459, 68.48849366276391),
 (-97.14621337170688, 68.57308500473383), ...]
```

- ▶ a list of attributes of the shapes



```
print b.lands_info
{'RINGNUM': 1, 'Name': 'Greenland', 'SHAPENUM': 4}
{'RINGNUM': 1, 'Name': 'Australia', 'SHAPENUM': 5}
```

- ▶ and a list of (low-level) geoslib polygons

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion

- ▶ Basic matplotlib handles only plotting 2D datasets x,y
- ▶ Plotting of x,y,z relies on the mplot3d toolkit, computing 2D projections of 3D data
- ▶ It works by adding a *3d projection* axe to the figure (since matplotlib 1.0.0)
- ▶ 3D plotting methods are available from the `Axes3D` instance

- ▶ Gallery :

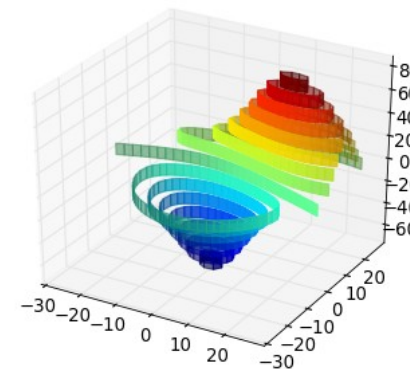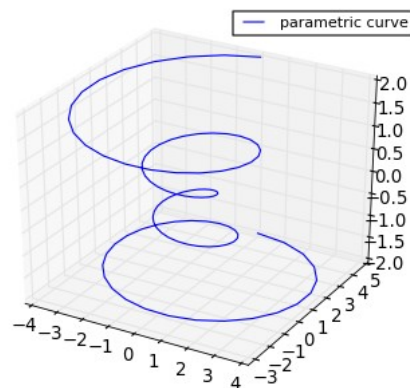

► Get a 3D axe :




```
import matplotlib.pyplot as plt
from mpl_toolkits.mplot3d import Axes3D
fig=plt.figure()
axes3d=fig.gca(projection='3d')
```

► From this instance, choose between :



```
bar3D, contour3D, plot3D, plot_surface,
plot_wireframe, scatter3D, text2D, text3D,
```

- ▶ Each plotting function uses 3 arrays as an input
- ▶ The shape of these arrays depend on the plot
- ▶ For 3D line plots, bar plots, scatter plots, X,Y,Z are 1D array

length = number of points to be plotted

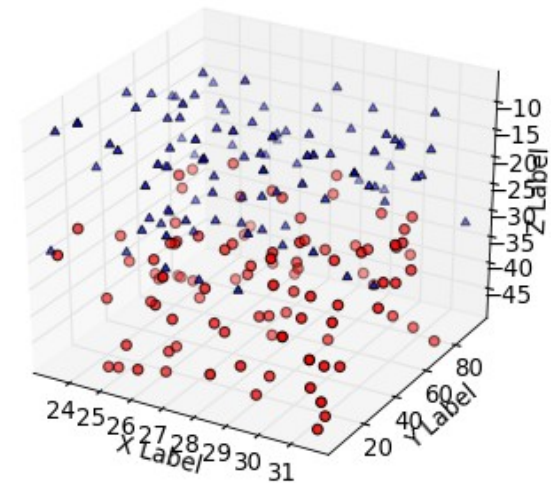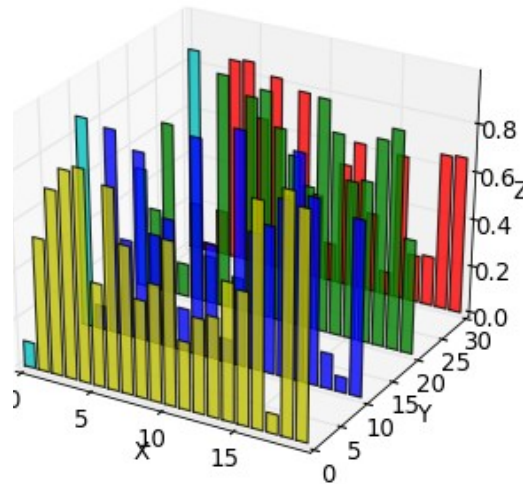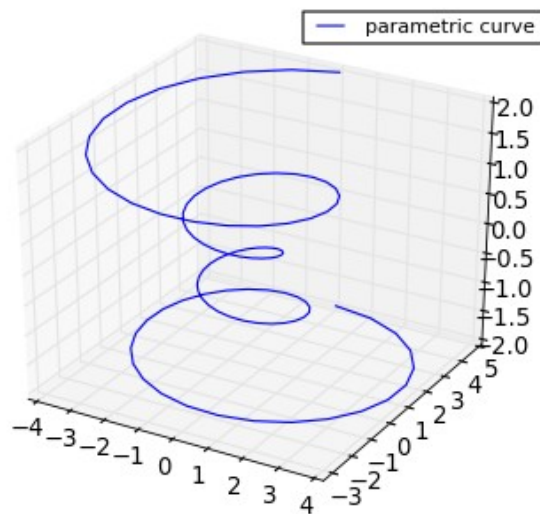

- ▶ For wireframe plots, surface plots, X, Y are 2D coordinates matrices, Z is a 2D array containing the values

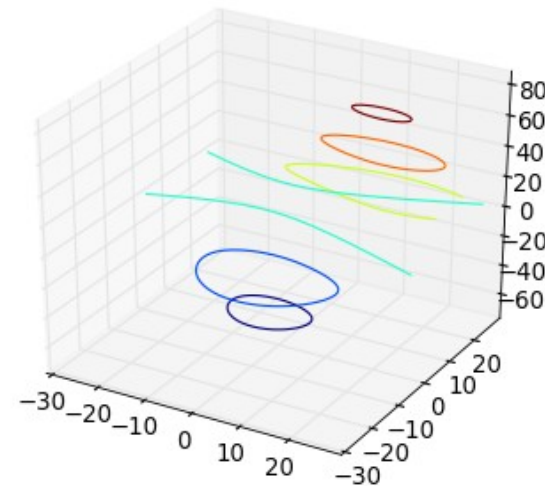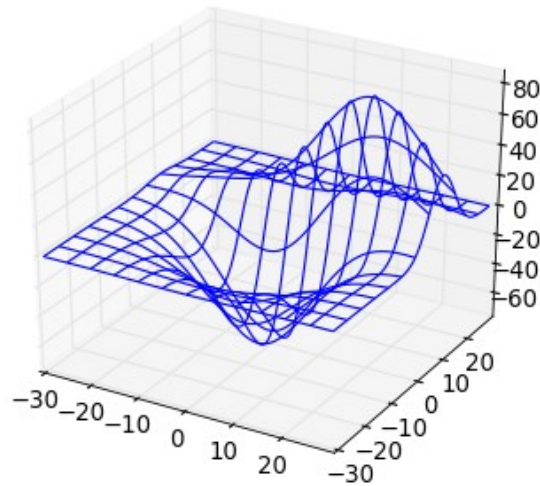

- ▶ What is Matplotlib ?
- ▶ Matplotlib basics
- ▶ Useful extensions
 - Images
 - Basemap
 - Going 3D
- ▶ Conclusion

Matplotlib :

- ▶ is the python package to keep in mind when it comes to plotting
- ▶ tries to mimic matlab
- ▶ is tightly coupled to numpy and other top python libraries
- ▶ is integrated in ipython, pythonxy and other IDE
- ▶ Can help you to migrate from Matlab to python :
<http://www.projet-plume.org/files/PRaybaut.pdf>